


Photometric Diagram

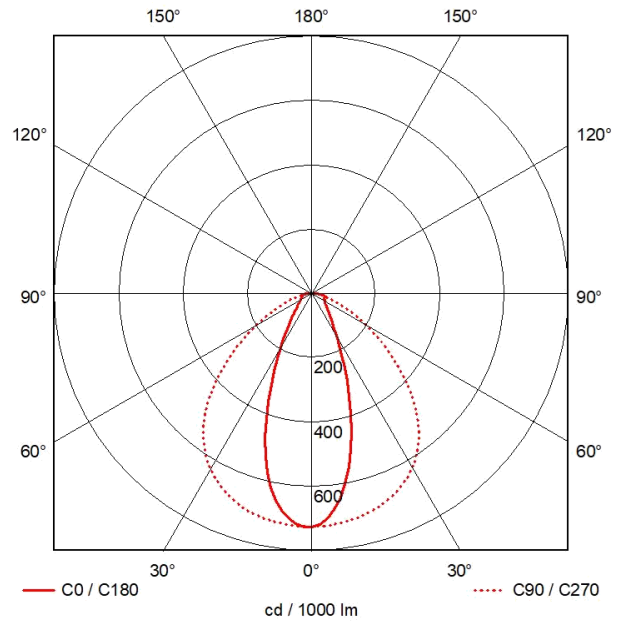

Luminaire Efficiency: 96%

Life/ Maintenance

• LED Driver Average Rated Life	120 000hrs
• LED Life	72 000hrs (L80 F10, TP 65°C)

Application

- Warehouse
- Industrial
- High Racking
- Factory

Benefits

- **5 Year warranty**
- **Built-in surge Protection of 4kV**

Product Features and Accessories

- High colour rendering index CRI > 80
- Colour temperature 4000K (3000K and 5000K on request)
- Small colour tolerance - MacAdam 3
- Tridonic LED module and driver
- Ripple current < 3%
- All fixtures component parts are replaceable
- Ambient temperature: -40...+80°C
- Complete with 2 x P2000 mounting brackets and 4 x M5 eyebolts
- Surface or recessed
- Rolled mild steel body with a structured silver epoxy powder coated finish
- Complete with 3m cabyre and 5 Amp plug
- HUBBELL end mount WASP sensor available
- DALI/DSI and dimmable options available
- Emergency options available

Specification	Lumen @ 65°C	System Power	Power Factor	Current	Dimensions			Weight
					L	W	H	
A-BAY-IND-54W-LED	9878	58.5W	0.98	300mA	1195mm	240mm	80mm	5kg
A-BAY-IND-72W-LED	13117	79.4W	0.98	400mA	1195mm	240mm	80mm	5kg
A-BAY-IND-108W-LED	19676	119W	0.98	400mA	1195mm	240mm	80mm	5kg
A-BAY-IND-136W-LED	23896	142W	0.98	500mA	1195mm	240mm	80mm	5kg

