


Photometric Diagram

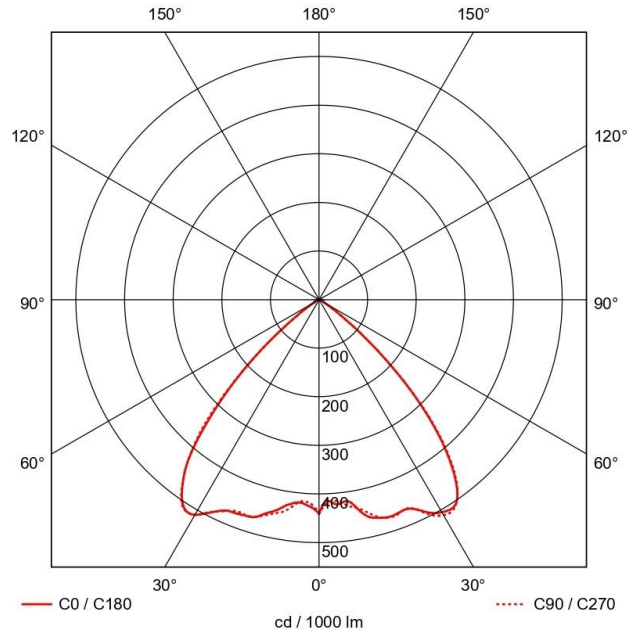

Luminaire Efficiency: 84%

Life/ Maintenance

• LED Driver Average Rated Life	100 000hrs
• LED Life	54 000hrs (L80 F10, TP 45°C)

Application

- Tunnel
- Industrial
- Conveyor
- Security

Benefits

- **5 Year warranty**
- Built-in surge Protection (optional extra 10kA/10kV available)

Product Features and Accessories

- High colour rendering index CRI > 80
- Colour temperature 4000K (3000K AND 5000K on request)
- Tridonic LED modules and driver
- Ambient temperature: -25... +80°C
- LM6 high pressure die cast aluminium body
- Clear borosilicate glass lens
- 316 stainless steel screws and heli-coils
- 3 x 20mm ø cable entry knockouts and 1 x M20 threaded gland entry
- Wide beam and narrow beam optics available
- Mounting bracket included

Specification	Lumen @ 45°C	System Power	Power Factor	Current	Dimensions			Weight
					L	W	H	
B40-34W-LED	6280	38W	0.95	500mA	410mm	271mm	120mm	4kg
B40-50W-LED	8536	53W	0.95	700mA	410mm	271mm	120mm	4kg

