


Photometric Diagram

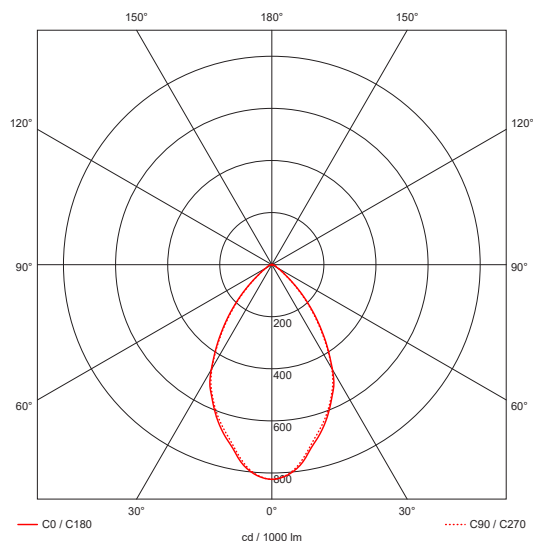

**Luminaire efficiency: 92%**

### Life/Maintenance

LED Driver Average Rated Life	50 000hrs
LED Life	50 000hrs (L80 F10, TP 45°C)

### Applications

- Tunnel
- Industrial
- Conveyor
- Security

### Benefits

- **5 year warranty**
- Built-in surge protection

### Product Features and Accessories

- High colour rendering index CRI > 80
- Colour temperature 4000K (3000K on request)
- Vossloh Schwabe main voltage (220-240V) LED module
- Ambient temperature: -25...+80°C
- LM6 high pressure die cast aluminium body
- Polycarbonate diffuser
- 316 stainless steel screws and hell-coils
- 3 x 20mm Ø cable entry knockouts and 1 x M20 threaded gland entry
- Mounting bracket available (ordered separately)

Specification	Lumen @ 45°C	System Power	Power Factor	Dimensions			Weight
				L	W	H	
B43-34W-LED	4000	36.5W	0.95	410mm	271mm	132mm	3.5kg
B43-46W-LED	7495	50W	0.95	410mm	271mm	132mm	3.5kg
B43-71.5W-LED	10825	77W	0.95	410mm	271mm	132mm	3.5kg

