


Photometric Diagram

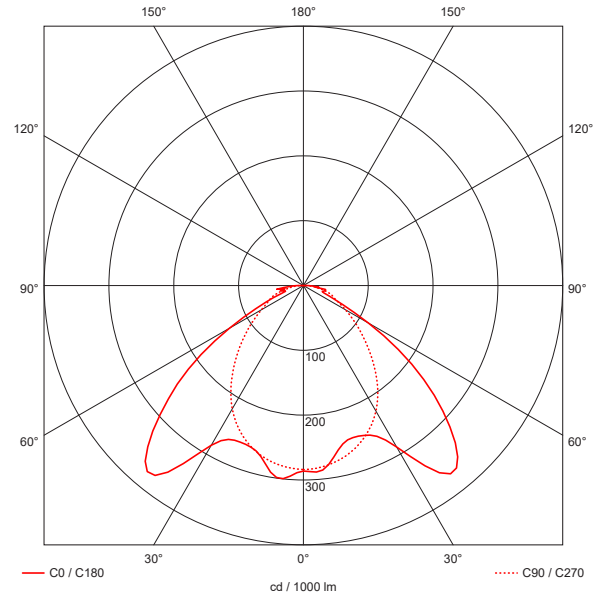

**Luminaire efficiency: 95.9%**

### Life/Maintenance

LED Driver Average Rated Life	100 000hrs
LED Life	> 60 000hrs (L80 F10, TP 45°C)

### Applications

- Supermarkets
- Food stores
- Fashion stores
- Furniture stores

### Benefits

- **5 year warranty**
- Built-in surge protection

### Product Features and Accessories

- High colour rendering index CRI > 80
- Colour temperature 4000K (3000K and 5000K on request)
- Small colour tolerance - MacAdam 3
- Tridonic LED module and driver
- Ambient temperature: -25...+45°C
- Rolled mild steel body with a white epoxy powder coated finish
- Semi-transparent PMMA diffuser
- Polycarbonate end-caps
- DALI/DSI and dimmable options available
- Emergency options available
- High efficiency version
- Direct replacement for 1x54W or 1x85W

Specification	Lumen @ 45°C	System Power	Power Factor	Current	Dimensions				Weight
					L	W1	W2	H	
BATTEN-BW-24W-LED	4530	26.9W	0.98	300mA	1180mm	40mm	80mm	60mm	1.5kg
BATTEN-BW-36W-LED	6510	39.9W	0.98	400mA	1180mm	40mm	80mm	60mm	1.5kg

