


### Photometric Diagram

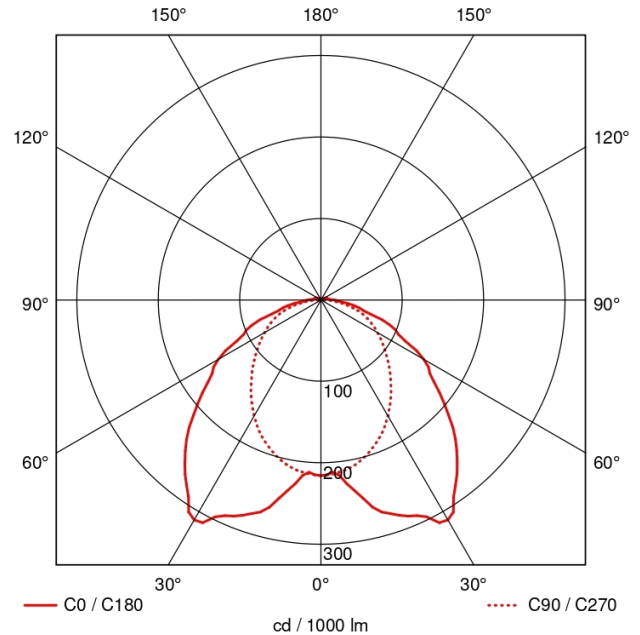

**Luminaire Efficiency: 88.12%**

#### Life/ Maintenance

• LED Driver Average Rated Life	100 000hrs
• LED Life	72 000hrs (L80 F10, TP 65°C)

#### Application

- Parking Garages
- Industrial Halls
- Cold Storage Facilities
- Power Stations

#### Benefits

- **5 Year warranty**
- Built-in surge Protection

#### Product Features and Accessories

- High colour rendering index CRI > 80
- Colour temperature 4000K (3000K and 5000K on request)
- Small colour tolerance - MacAdam 3
- Tridonic LED module and driver
- Ripple current < 3%
- All fixtures component parts are replaceable
- Ambient temperature: -25...+45°C
- Self-extinguishing polycarbonate body
- UV stabilized, self-extinguishing polycarbonate diffuser with photo-engraved interior and smooth outer surface
- Anti-tamper polycarbonate snap-lock latches (stainless steel on request)
- Hinge-able gear tray
- Complete with mounting accessories
- DALI/DSI and dimmable options available
- Emergency options available
- High efficiency version

Specification	Lumen @ 65°C	System Power	Power Factor	Current	Dimensions					Weight
					L	Lf	W	H1	H2	
C10-HE-24W-LED	4561	26.7W	0.98	275mA	1270mm	795mm	100mm	100mm	110mm	2kg
C10-HE-34W-LED	6118	37.7W	0.98	375mA	1270mm	795mm	100mm	100mm	110mm	2kg