


Photometric Diagram

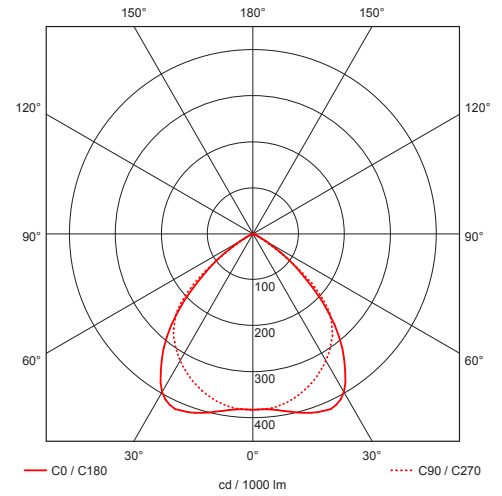

Luminaire efficiency: 82.05%

Life/Maintenance

LED Driver Average Rated Life	100 000hrs
LED Life	> 60 000hrs (L80 F10, TP 45°C)

Applications

- Offices
- Retail stores
- Healthcare
- Meeting rooms

Benefits

- **5 year warranty**
- Built-in surge protection

Product Features and Accessories

- High colour rendering index CRI > 80
- Colour temperature 4000K (3000K and 5000K on request)
- Small colour tolerance - MacAdam 3
- Tridonic LED module and driver
- Ambient temperature: -25...+45°C
- Easily removable in-fill panels to access the driver
- The louvre is fixed to the body by means of four spring clips
- 1520G3 anti-iridescent matt aluminium louvre
- Rolled mild steel body with a white epoxy powder coated finish
- Complete with 3m cable and 5 Amp plug
- DALI/DSI and dimmable options available
- Emergency options available

Specification	Lumen @ 45°C	System Power	Power Factor	Current	Dimensions			Weight
					L	W	H	
FM95-24W-LED	4530	26.9W	0.98	275mA	597mm	597mm	53mm	3.0kg
FM95-34W-LED	6080	37.3W	0.98	375mA	597mm	597mm	53mm	3.0kg

