


Photometric Diagram

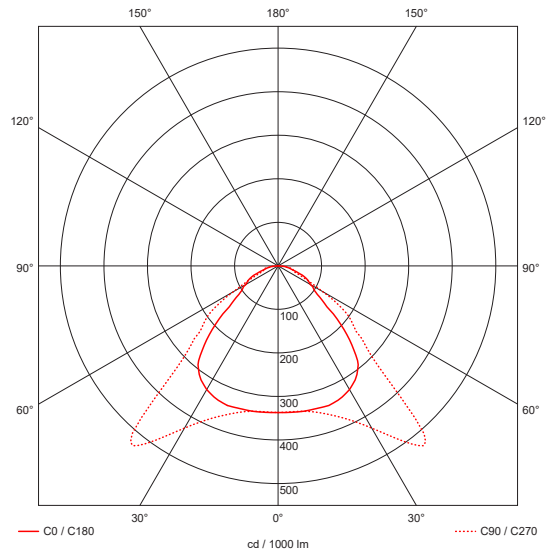

Luminaire efficiency: 100%

Life/Maintenance

LED Driver Average Rated Life	50 000hrs
LED Life	46 000hrs (L70 F10, TP 45°C)

Applications

- Offices
- Retail
- Healthcare
- Educational facilities

Benefits

- **5 year warranty**
- Built-in surge protection

Product Features and Accessories

- High colour rendering index CRI > 80
- Colour temperature 4000K or 3000K
- Ambient temperature: -20...+40°C
- 5 year warranty
- 3m cable and 5 Amp plug (available on request)
- Ideal retrofit solution for ceilings up to 3.5m
- Ripple current 5%
- Honeycomb optic
- Suspension kits available on request

Specification	Lumen @ 45°C	System Power	Power Factor	Current	Dimensions			Weight
					L	W	H	
LPB-S-32W-LED-4K	3800	36.3W	0.98	800mA	601mm	601mm	45mm	2.5kg
LPB-S-32W-LED-3K	3550	36.3W	0.98	800mA	601mm	601mm	45mm	2.5kg

