


**Photometric Diagram**

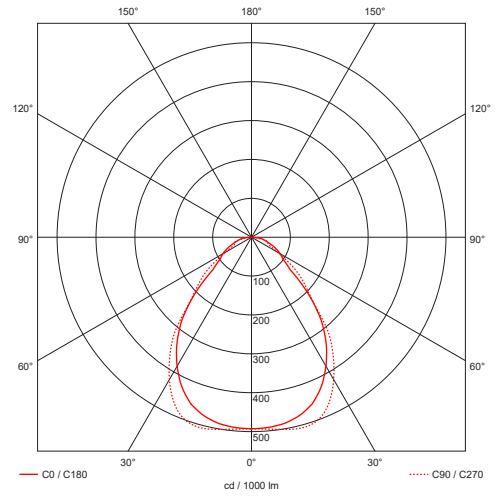

**Luminaire efficiency: 100%**

**Life/Maintenance**

|                               |                              |
|-------------------------------|------------------------------|
| LED Driver Average Rated Life | 50 000hrs                    |
| LED Life                      | 46 000hrs (L70 F10, TP 45°C) |

**Applications**

- Offices
- Retail
- Healthcare
- Educational facilities

**Benefits**

- **5 year warranty**
- Built-in surge protection

**Product Features and Accessories**

- High colour rendering index CRI > 80
- Colour temperature 4000K or 3000K
- Ambient temperature: -20...+40°C
- 5 Year warranty
- 3m cable and 5 Amp plug (available on request)
- Ideal retrofit solution for high ceilings
- Ripple current 5%
- Microprism optic

| Specification  | Lumen @ 45°C | System Power | Power Factor | Current | Dimensions |       |       | Weight |
|----------------|--------------|--------------|--------------|---------|------------|-------|-------|--------|
|                |              |              |              |         | L          | W     | H     |        |
| LPM-32W-LED-4K | 3800         | 36.3W        | 0.98         | 800mA   | 595mm      | 595mm | 8.5mm | 2.5kg  |
| LPM-32W-LED-3K | 3550         | 36.3W        | 0.98         | 800mA   | 595mm      | 595mm | 8.5mm | 2.5kg  |

