


Photometric Diagram

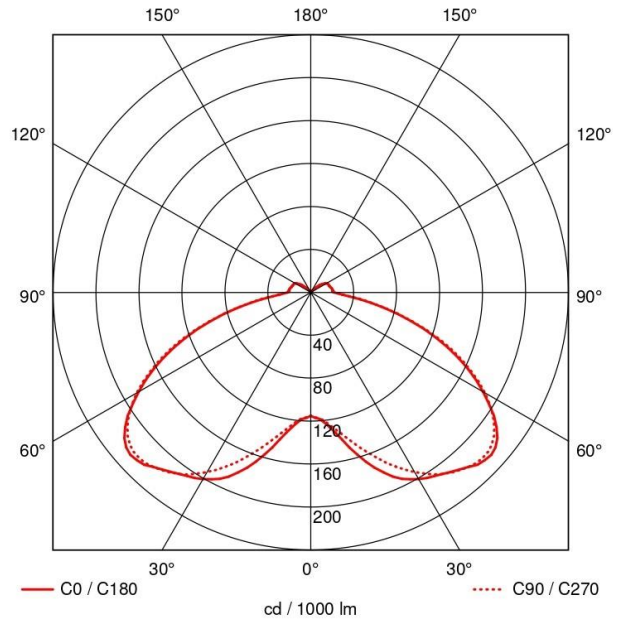

Luminaire Efficiency: 84%

Life/ Maintenance

• LED Driver Average Rated Life	100 000hrs
• LED Life	54 000hrs (L80 F10, TP 45°C)

Application

- Parking Areas
- Shopping Malls
- Malls
- Parks

Benefits

- **5 Year warranty**
- Built-in surge Protection

Product Features and Accessories

- High colour rendering index CRI > 80
- Colour temperature 4000K (3000K and 5000K available on request)
- Small colour tolerance – MacAdam 3
- LM6 marine grade aluminium powder coated RAL 7035
- Polycarbonate diffuser
- Polycarbonate lid
- Totally enclosed no entry from the lid, entry only from the base of the spigot
- Available in black

Specification	Lumen @ 45°C	System Power	Power Factor	Current	Dimensions			Weight
					Diameter Top	Bottom Entry	H	
LUCCA-32W-LED	6000	35.2W	0.98	350mA	460mm	76mm	400mm	4.75kg
LUCCA-45W-LED	8000	50W	0.98	500mA	460mm	76mm	400mm	4.75kg

