


Photometric Diagram

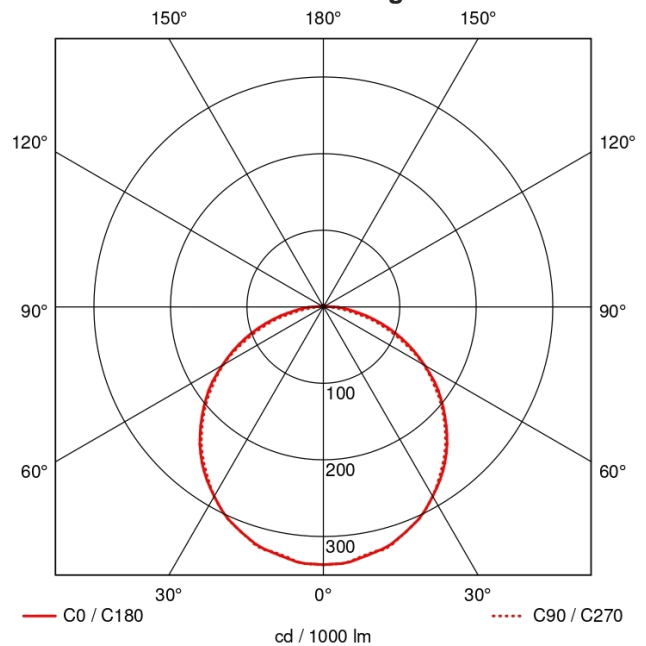

Luminaire Efficiency: 80%

Life/ Maintenance

- | | |
|---------------------------------|---------------------|
| • LED Driver Average Rated Life | 50 000hrs |
| • LED Life | 50 000hrs (L70 F10) |

Application

- | | |
|-----------------------------|--------------------|
| • Residential | • Conference Rooms |
| • Offices / Reception Areas | • Hotels |

Benefits

- 5 Year warranty
- Built-in surge Protection

Product Features and Accessories

- High colour rendering index CRI > 80
- Colour temperature 3000K (4000K and 5000K on request)
- 6063T6 Grade extruded Aluminium
- Remote control gear
- Frosted low loss acrylic diffuser
- Finish – natural and black anodized, white powder coated
- 10W, 15W and 25W versions available
- Custom cut length up to 5m
- Fully dimmable

Specification	Lumen per m	System Power	Power Factor	Dimensions				Weight
				Cut Out	W1	W2	H	
LYNX-R - 10W	1050	12W	0.96	37mm	35.5mm	57mm	35.5mm	0.75kg p/m
LYNX-R - 15W	2020	17W	0.96	37mm	35.5mm	57mm	35.5mm	0.75kg p/m
LYNX-R - 25W	3700	28W	0.96	37mm	35.5mm	57mm	35.5mm	0.75kg p/m