


Photometric Diagram

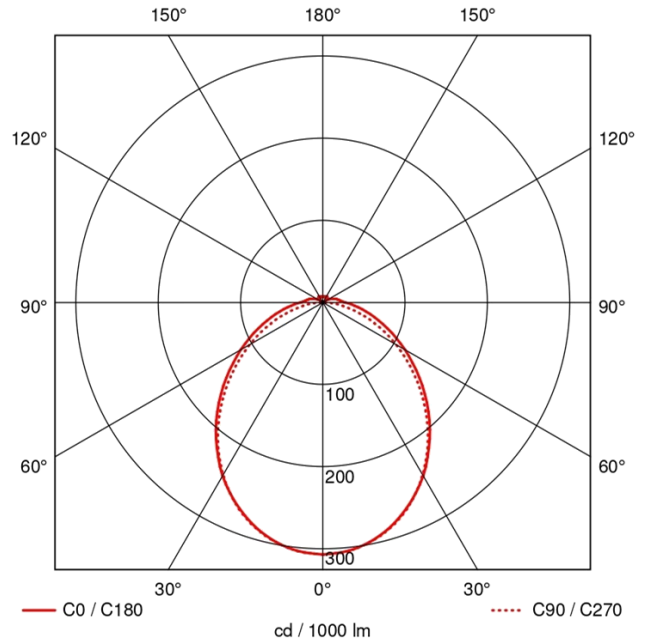

Luminaire Efficiency: 84.67%

Life/ Maintenance

• LED Driver Average Rated Life	100 000hrs
• LED Life	72 000hrs (L80 F10, TP 65°C)

Application

- Offices
- Passages
- Hospitals
- Schools

Benefits

- **5 Year warranty**
- Built-in surge Protection

Product Features and Accessories

- High colour rendering index CRI > 80
- Colour temperature 4000K (3000K and 5000K on request)
- Small colour tolerance - MacAdam 3
- Tridonic LED module and driver
- Ripple current < 3%
- All fixtures component parts are replaceable
- Ambient temperature: -25...+45°C
- Snap-on injection moulded plastic end-caps
- Frosted prismatic diffuser
- Individual mounting and continuous row mounting (mid cap assembly ordered separately)
- DALI/DSI and dimmable options available
- Emergency options available

Specification	Lumen @ 65°C	System Power	Power Factor	Current	Dimensions				Weight
					L	A	W	H	
M6V-24W-LED	4561	26.7W	0.98	275mA	683mm	460mm	208mm	77mm	1.6kg
M6V-34W-LED	6118	37.1W	0.98	375mA	683mm	460mm	208mm	77mm	1.6kg
M6V-40W-LED	7664	43.3W	0.98	225mA	1250mm	800mm	208mm	77mm	2.2kg
M6V-54W-LED	9878	58.8W	0.98	300mA	1250mm	800mm	208mm	77mm	2.2kg

