


Photometric Diagram

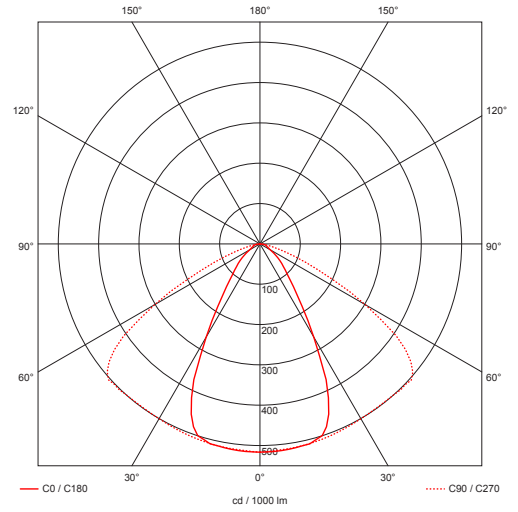

**Luminaire efficiency: 92.3%**

**Life/Maintenance**

LED Driver Average Rated Life	100 000hrs
LED Life	> 60 000hrs (L80 F10, TP 45°C)

**Applications**

- Warehouses
- Industry
- Aisles
- Factories

**Benefits**

- **5 year warranty**
- Built-in surge protection

**Product Features and Accessories**

- High colour rendering index CRI > 80
- Colour temperature 4000K (3000K and 5000K on request)
- Small colour tolerance - MacAdam 3
- Tridonic LED module and driver
- Ambient temperature: -25...+45°C
- Designed for quick and easy installations. Comes complete with 2 x P2000 mounting brackets and 4 x M5 eyebolts
- Rolled mild steel body with a structured silver epoxy powder coated finish
- Complete with 3m cable and 5 Amp plug
- Complete with medium bay optic
- DALI/DSI and dimmable options available
- Emergency options available
- High efficiency and high output versions

Specification	Lumen @ 45°C	System Power	Power Factor	Current	Dimensions			Weight
					L	W	H	
N-BAY-68W-LED-HE	12 160	74.6W	0.98	375mA	1195mm	240mm	80mm	4.0kg
N-BAY-110W-LED-HO	18 140	120.8W	0.98	400mA	1195mm	240mm	80mm	4.0kg

