




Photometric Diagram

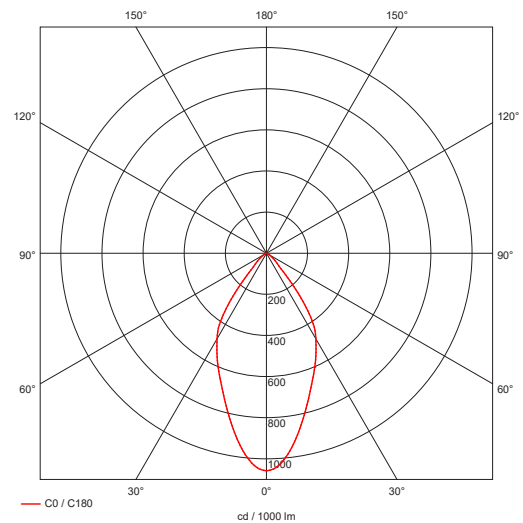

**Luminaire efficiency: 89.9%**

Colours available



Matt black



Matt white

#### Life/Maintenance

LED Driver Average Rated Life	50 000hrs
LED Life	> 50 000hrs (L80 F10, TP 45°C)

#### Applications

- Retail
- Shopping malls
- Hotels
- Interior architectural lighting

#### Benefits

- **5 year warranty**

#### Product Features and Accessories

- High colour rendering index CRI > 80 (CRI > 90 available on request)
- Colour temperature 4000K (3000K on request)
- Small colour tolerance - MacAdam 3
- 5 year warranty
- Special colours on request
- Powder coated aluminium body
- Available in wide and narrow beam (54° and 34°)
- Integral driver
- Higher wattage and output available on request

Specification	Lumen @ 45°C	System Power	Power Factor	Current	Dimensions		Weight
					D	H	
PD-12W	2115	14.2W	0.98	350mA	285	300	2.3kg
PD-17W	2950	20.9W	0.98	500mA	285	300	2.3kg
PD-25W	4010	28.6W	0.98	700mA	285	300	2.3kg