


Photometric Diagram

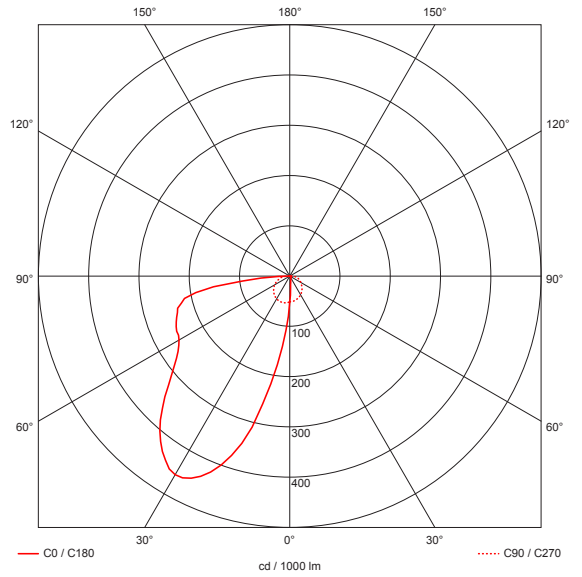

**Luminaire efficiency: 66.4%**

**Life/Maintenance**

LED Driver Average Rated Life	100 000hrs
LED Life	> 60 000hrs (L80 F10, TP 45°C)

**Applications**

- Retail stores
- Fashion stores
- Food stores
- Lecture rooms

**Benefits**

- **5 year warranty**
- Built-in surge protection

**Product Features and Accessories**

- High colour rendering index CRI > 80
- Colour temperature 4000K (3000K and 5000K on request)
- Small colour tolerance - MacAdam 3
- Tridonic LED module and driver
- Ambient temperature: -25...+45°C
- Provides uniform illumination of the vertical surface from the ceiling
- Can be surface mounted or recessed
- Polished anodized aluminium high performance reflector
- Optic hides the LEDs
- Rolled mild steel body with a grey epoxy powder coated finish (white body available on request)
- DALI/DSI and dimmable options available

Specification	Lumen @ 45°C	System Power	Power Factor	Current	Dimensions			Weight
					L	W	H	
RAW-22W-LED	4190	24.3W	0.98	250mA	1191mm	191mm	60mm	3.2kg
RAW-34W-LED	6080	37.3W	0.98	375mA	1191mm	191mm	60mm	3.2kg

