


Photometric Diagram

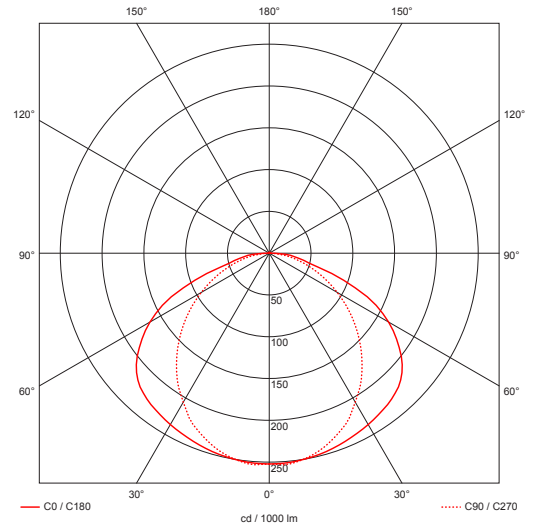

Luminaire efficiency: 79.7%

Life/Maintenance

LED Driver Average Rated Life	100 000hrs
LED Life	> 60 000hrs (L80 F10, TP 45°C)

Applications

- Offices
- Hospitals
- Lecture halls
- Retail stores

Benefits

- **5 year warranty**
- Built-in surge protection

Product Features and Accessories

- High colour rendering index CRI > 80
- Colour temperature 4000K (3000K and 5000K on request)
- Small colour tolerance - MacAdam 3
- Tridonic LED module and driver
- Ambient temperature: -25...+45°C
- Rolled mild steel body with a matt white epoxy powder coated finish
- Rolled mild steel back reflectors with a matt white epoxy powder coated finish
- High transmission optic hides the LEDs
- DALI/DSI and dimmable options available
- Emergency options available
- Matt white infill panels for 1200 x 600 ceiling grid available

Specification	Lumen @ 45°C	System Power	Power Factor	Current	Dimensions			Weight
					L	W	H	
RCC-27W-LED	4910	32.1W	0.98	300mA	597mm	597mm	61mm	5.6kg
RCC-36W-LED	6510	39.9W	0.98	400mA	597mm	597mm	61mm	5.6kg

