


**Photometric Diagram**

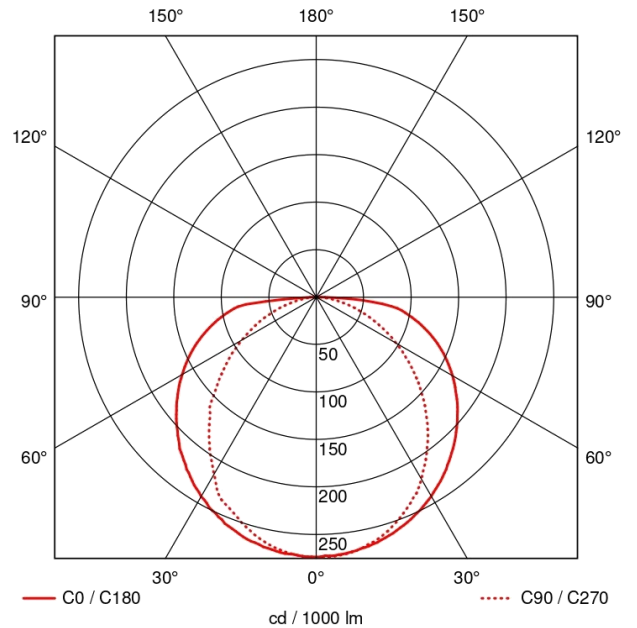

**Luminaire Efficiency: 85.58%**

**Life/ Maintenance**

• LED Driver Average Rated Life	100 000hrs
• LED Life	72 000hrs (L80 F10, TP 65°C)

**Application**

- Retail Stores
- Laboratories
- Lecture Halls
- Commerce

**Benefits**

- **5 Year warranty**
- Built-in surge Protection

**Product Features and Accessories**

- High colour rendering index CRI > 80
- Colour temperature 4000K (3000K and 5000K on request)
- Small colour tolerance - MacAdam 3
- Tridonic LED module and driver
- Ripple current < 3%
- All fixtures component parts are replaceable
- Ambient temperature: -25...+45°C
- High transmission optic hides the LEDs
- DALI/DSI and dimmable options available
- Emergency options available
- Direct replacement for 3x18W and 3x36W T8

Specification	Lumen @ 65°C	System Power	Power Factor	Current	Dimensions			Weight
					L	W	H	
RCS-18W-LED	3280	19.9W	0.98	400mA	597mm	597mm	60mm	5kg
RCS-24W-LED	4561	26.7W	0.98	275mA	1197mm	597mm	60mm	9.6kg
RCS-34W-LED	6118	37.1W	0.98	375mA	1197mm	597mm	60mm	9.6kg
RCS-43W-HO-LED	7986	47.8W	0.98	375mA	1197mm	597mm	60mm	9.6kg
RCS-54W-HO-LED	9838	59.5W	0.98	400mA	1197mm	597mm	60mm	9.6kg

