


Photometric Diagram

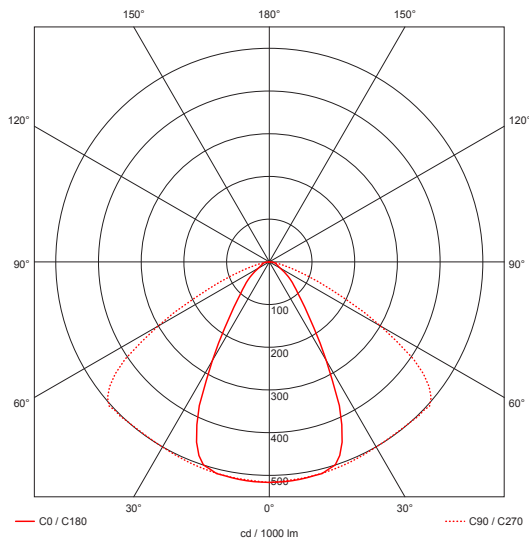

**Luminaire efficiency: 92.3%**

**Life/Maintenance**

LED Driver Average Rated Life	100 000hrs
LED Life	> 60 000hrs (L80 F10, TP 45°C)

**Applications**

- Warehouses
- Industrial
- Aisle lighting
- Factory

**Benefits**

- **5 year warranty**
- Built-in surge protection

**Product Features and Accessories**

- High colour rendering index CRI > 80
- Colour temperature 4000K (3000K and 5000K on request)
- Small colour tolerance - MacAdam 3
- Tridonic LED module and driver
- Ambient temperature: -25...+45°C
- Complete with 2 x P2000 mounting brackets and 4 x M5 eyebolts
- Surface or recessed
- Rolled mild steel body with a structured silver epoxy powder coated finish
- Complete with 3m cable and 5 Amp plug
- Complete with clear diffuser
- HUBBELL end mount WASP sensor available
- DALI/DSI and dimmable options available
- Emergency options available

Specification	Lumen @ 45°C	System Power	Power Factor	Current	Dimensions			Weight
					L	W	H	
S-BAY-102W-LED	18 240	111.9W	0.98	375mA	1195mm	418mm	105mm	4.6kg
S-BAY-136W-LED	24 320	149.2W	0.98	375mA	1195mm	418mm	105mm	4.6kg

