




Photometric Diagram

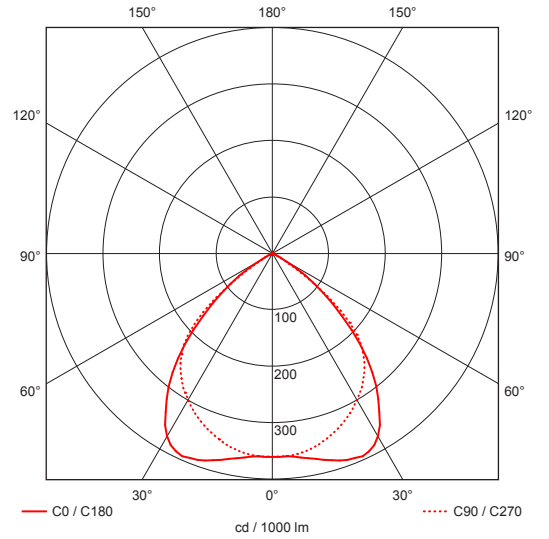

**Luminaire efficiency: 77.34%**

### Life/Maintenance

|                               |                                |
|-------------------------------|--------------------------------|
| LED Driver Average Rated Life | 100 000hrs                     |
| LED Life                      | > 60 000hrs (L80 F10, TP 45°C) |

### Applications

- Offices
- Reception areas
- Passages
- Study halls

### Benefits

- **5 year warranty**
- Built-in surge protection

### Product Features and Accessories

- High colour rendering index CRI > 80
- Colour temperature 4000K (3000K and 5000K on request)
- Small colour tolerance - MacAdam 3
- Tridonic LED module and driver
- Ambient temperature: -25...+45°C
- Rolled mild steel body with a structured silver or matt white epoxy powder coated finish
- 1520G3 anti-iridescent matt aluminium louvre
- DALI/DSI and dimmable options available
- Emergency options available

| Specification | Lumen @ 45°C | System Power | Power Factor | Current | Dimensions |       |      | Weight |
|---------------|--------------|--------------|--------------|---------|------------|-------|------|--------|
|               |              |              |              |         | L          | W     | H    |        |
| SL95-24W-LED  | 4530         | 26.9W        | 0.98         | 275mA   | 1260mm     | 175mm | 53mm | 4.4kg  |
| SL95-34W-LED  | 6080         | 37.3W        | 0.98         | 375mA   | 1260mm     | 175mm | 53mm | 4.4kg  |

