




Curved Diffuser




Flat Diffuser



Open Diffuser



Photometric Diagram

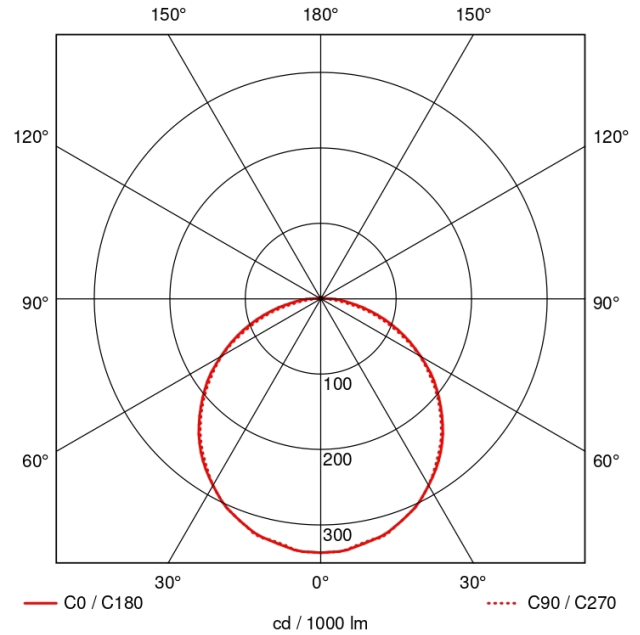

Luminaire Efficiency: 80%

Life/ Maintenance

- | | |
|---------------------------------|---------------------|
| • LED Driver Average Rated Life | 50 000hrs |
| • LED Life | 50 000hrs (L70 F10) |

Application

- | | |
|------------------|-----------|
| • Retail Stores | • Offices |
| • Shopping Malls | • Hotels |

Benefits

- 5 Year warranty
- Built-in surge Protection

Product Features and Accessories

- High colour rendering index CRI > 80
- Colour temperature 3000K (4000K and 5000K on request)
- 6063T6 Grade extruded Aluminium
- Remote control gear
- Clear and Opal Diffusers available
- Finish – natural and black anodized
- 5W, 10W and 15W versions available
- Custom cut length up to 5m
- DALI and dimmable options available
- Fixing via clips
- Magnetic tape fixing available
- Mechanical clips available in 0°, 15°, 30°, 45° and 60°

Specification	Lumen per m	System Power	Power Factor	Dimensions					Weight
				W1	W2	H1	H2	H3	
SLIMLINE - 5W	850	6W	0.96	18mm	20mm	10mm	12mm	17mm	0.2kg p/m
SLIMLINE - 10W	1700	12W	0.96	18mm	20mm	10mm	12mm	17mm	0.2kg p/m
SLIMLINE - 15W	2020	17W	0.96	18mm	20mm	10mm	12mm	17mm	0.2kg p/m

