


Photometric Diagram

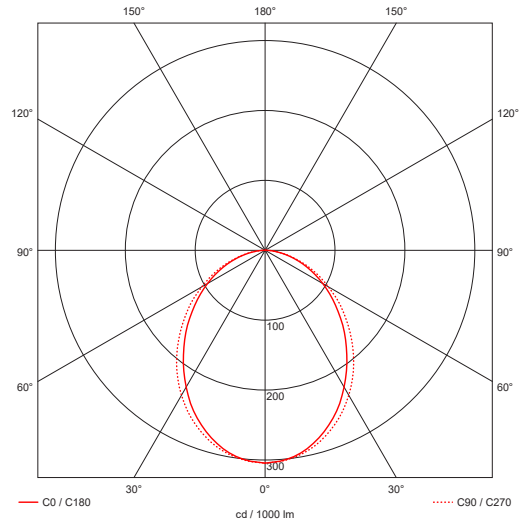

Luminaire efficiency: 73.6%

Life/Maintenance

LED Driver Average Rated Life	100 000hrs
LED Life	> 60 000hrs (L80 F10, TP 45°C)

Applications

- Retail stores
- Offices
- Lecture halls
- Reception areas

Benefits

- **5 year warranty**
- Built-in surge protection

Product Features and Accessories

- High colour rendering index CRI > 80
- Colour temperature 4000K (3000K and 5000K on request)
- Small colour tolerance - MacAdam 3
- Tridonic LED module and driver
- Ambient temperature: -25...+45°C
- Surface or suspended luminaire
- Frosted acrylic diffuser
- Extruded aluminium body
- Available in matt black, white, white aluminium
- DALI/DSI and dimmable options available
- Emergency options available
- Custom lengths to order
- Available in standard 600mm, 1200mm, 1800mm, 2400mm
- Multiple wattage and lumen packages available

Specification	Lumen @ 45°C	System Power	Power Factor	Current	Dimensions				Weight
					L	L2	W	H	
U-PROFILE-S-12W-LED-600	2265	13.5W	0.98	275mA	580mm	530mm	62mm	66mm	0.65kg
U-PROFILE-S-24W-LED-1200	4530	36.9W	0.98	275mA	1140mm	1090mm	62mm	66mm	1.3kg
U-PROFILE-S-36W-LED-1800	6795	40.4W	0.98	275mA	1770mm	1720mm	62mm	66mm	1.95kg
U-PROFILE-S-48W-LED-2400	9060	53.8W	0.98	275mA	2400mm	2350mm	62mm	66mm	2.6kg

